




# MD Super 80

## Microsoft Flight Simulator 2004

Aircraft : FlightFX. by Sam Chin, Mike Baumann,  
Massimo Grassi  
Panel : Marco Spada and Paul Golding



Foto: Joe Statz

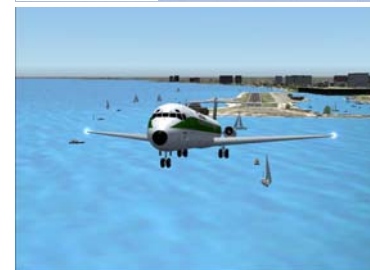

Werner Schott  
Switzerland  
w.schott@abts.ch



Foto: Peter Unmuth

Other simulator checklists and other sim/real aviation items available for download at <http://www.faatest.com> and <http://www.faatest.com/downloads/simchecklists/simchecklists.html>

## Pre-Start Checklist

Parking Brake	SET
Throttle	IDLE
Fuel Flow	CUTOFF
BATT Master Switch	ON
Panel Lights	ON if required
Landing Gear Lever	CHECK DOWN
Flaps	UP
Spoiler	RETRACTED
Fuel Quantity	CHECK
Pitot Heat	OFF
De-Ice	OFF
Flight controls	FREE AND CORRECT
Fasten Seat Belts	ON
No Smoking Sign	ON
Avionics	ON
Check Weather	(Atis, Flight Services)
De-Ice	TEST/CHECK
<b>Request Clearance</b>	
Transponder	STANDBY
Beacon	ON

## Startup Checklist

Thrust Levers	IDLE
Engine Area	CLEAR
APU (or GPU)	SELECT
APU (or GPU)	START/ON
Left Engine	IGNITION (hold until engine starts)
At N2 > 20% Fuel Flow Eng 1	ON
N1 increasing as N2 incr.	CHECK
Oil Pressure	CHECK
Repeat for Right Engine	
Aircondition fan	ON
APU (or GPU)	OFF
APU (or GPU)	SELECT OFF

## Securing Aircraft

Parking Brake	Verify SET
Throttle	Verify IDLE
All Switches	Verify OFF





## Landing Checklist

Autoland	Available ?
Landing Gear	CHECK DOWN
Autopilot and Autothrottle	OFF
Landing Speed	140 KIAS
After touchdown	Apply Reverse Thrust, at 60 kts: Cancel Reverse Thrust
Spoilers	VERIFY EXTENDED
Autobrake	OFF
Brakes	AS REQUIRED

## Taxi To Ramp

Strobe Light	OFF
Flaps	UP
Spoilers	RETRACTED
Taxi Lights / Runway Turnoff Lights	ON
Landing Lights	OFF
Speed	Max. 20 knots
Transponder	1200 / OFF
Elevator Trim	TAKEOFF SETTING

## Shutdown Checklist

Parking Brake	SET
Throttle	IDLE
Passenger Signs	OFF
Aircondition fan	OFF
Pitot Heat	OFF
De-Ice	OFF
Taxi Lights / Runway Turnoff Lights	OFF
Nav Lights	OFF
Avionics	OFF
Fuel Flow	OFF
APU	OFF
APU	SELECT OFF
Beacon	OFF
Panel Lights	OFF
BATT Master Switch	OFF (Shift-M)

## Before Taxi Checklist

Nav Lights	ON
Taxi Lights / Runway Turnoff Lights	ON
Heading Indicator/Altimeters	SET
Radios and Avionics	SET FOR DEPARTURE
Autopilot	SET, ARM, don't activate
Autothrottle	SET, ARM, don't activate
Yaw Damper	ON
Autobrake	RTO

### *Request Taxi Clearance*

## Taxi Checklist

Parking Brake	RELEASE
Taxi to assigned runway	SPEED Max. 20 knots
Brakes	CHECK during taxi
Directional Gyro / Turn Coordinator	PROPER IND. during turns
Artificial Horizon	ERECT during turns

## Before Take-off Checklist

Parking Brake	SET
Throttle	IDLE
Elevator Trim	SET for takeoff
Flaps	10 deg
Spoilers	RETRACTED
Flight Instruments	CHECKED
Engine Instruments	CHECK
Takeoff Data (V1, VR, V2)	CHECK
Nav Equipment	CHECK
Landing Lights	ON
Taxi Lights / Runway Turnoff Lights	OFF
Strobe Light	ON
Pitot Heat	ON
De-Ice	AS REQUIRED
Transponder	ON

### *Request Takeoff Clearance*

## Take-off Checklist

Smoothly increase thrust to Takeoff Thrust	40% N1 let spool up
Brakes	FULL or TO/GA
V1 =	RELEASE
Vr =	135 KIAS (decision)
Pitch	140 KIAS (rotate)
V2 =	15 deg. nose up
At Positive Climb Rate	145 KIAS (safety speed)
Landing Gear	Touch Brakes
At 190 KIAS	RETRACT
	RETRACT FLAPS

## Climb-out Checklist

Throttle	AS REQUIRED
Trim for	250 KIAS / 1800 fpm
Autopilot/Autothrottle	CHECK and ACTIVATE
Autobrake	OFF
Below 10000' max. speed	250 KIAS
<b>ATC</b>	<b>AS REQUIRED</b>
Fasten Seat Belts	OFF
No Smoking Sign	OFF
Landing Lights	OFF
Above 10000' speed	290 KIAS

## Cruise Checklist (above FL 180)

At Transition Altitude (FL180) set Altimeter to	29,92" (1013mb)
Accelerate to cruise speed	FL180 0.68 mach
	FL240 0.76 mach
	FL280 0.78 mach
	FL330 0.78 mach
Engine+Instruments	CHECK
Fuel Quantity	CHECK
Radios	TUNED and SET
Autopilot	CHECK and SET
Lights	as required

## Descent Checklist

Atis/Airport Information	CHECK
Altimeter	CHECK
Radios	SET
De-Ice	AS REQUIRED
Descent Speed	to FL240 0.75 mach
	to FL180 0.67 mach
At Transition Altitude (FL180) reset Altimeter to local	to FL120 280 KIAS
	below 10'000ft 250 KIAS
Fuel Quantities and Balance	CHECK
Flaps / Landing Gear	CHECK UP
Check Weather	(ATIS, Flight Services)

## Approach Checklist

### *Localizer Level Flight :*

Fasten Seat Belts	ON
No Smoking Sign	ON
APU	SELECT
APU	START
Avionics + Radios	SET
Speed: Establish	200 KIAS
Landing Lights	ON
Auto Spoilers	ARM
Autobrake	SET
Flaps	10 degrees
Speed: Establish	170 KIAS
Flaps	20 degrees
Speed: Establish	150 KIAS
Landing Gear	DOWN
Turning toward runway: set flaps	FULL
<b>Final Glideslope Descent :</b>	
Speed Establish	145 KIAS
Elevator Trim	AS DESIRED
Parking Brake	VERIFY OFF
De-Ice	AS REQUIRED